

SG2.0/2.5/3.0RS-S

Suitable for 50Hz/60Hz grid, could be used in Asia, Africa, South America, Australia and Europe. Available for hand installation, no need for lifting machinery assistance.



☀️ HIGH YIELD

- Compatible with high power PV modules and bifacial modules
- Lower startup & wider MPPT voltage range
- Built-in smart PID Zero function

🛡️ SAFE AND RELIABLE

- Integrated arc fault circuit interrupter
- Built-in Type II DC&AC SPD
- Corrosion protection rating at C5


💡 USER FRIENDLY SETUP

- Plug and play installation
- One-click access to iSolarCloud monitoring platform
- Light and compact (A4 Size) with optimized heat dissipation design


⚙️ SMART MANAGEMENT

- Real time data (10 seconds refresh sample)
- 24/7 live online monitoring and with integrated display
- Online IV curve scan and diagnosis

CIRCUIT DIAGRAM

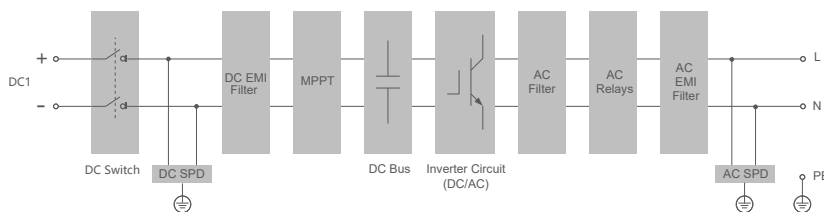

EFFICIENCY CURVE (SG3.0RS-S)

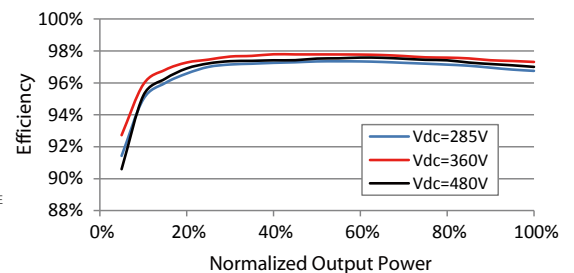

Type designation	SG2.0RS-S	SG2.5RS-S	SG3.0RS-S
Input (DC)			
Recommended max. PV input power	3 kWp	3.75 kWp	4.5 kWp
Max. PV input voltage		600 V	
Min. operating PV voltage / Start-up input voltage		40 V / 50 V	
Rated PV input voltage		360 V	
MPP voltage range		40 V – 560 V	
No. of independent MPP inputs		1	
Default No. of PV strings per MPPT		1	
Max. PV input current		16 A	
Max. DC short-circuit current		20 A	
Output (AC)			
Rated AC output power	2000 W	2500 W	3000 W
Max. AC Output power	2000 VA	2500 VA	3000 VA
Rated AC output current (at 230 V)	8.7 A	10.9 A	13.1 A
Max. AC output current	9.1 A	11.4 A	13.7 A
Rated AC voltage		220 V / 230 V / 240 V	
AC voltage range		154 V - 276 V	
Rated grid frequency / Grid frequency range		50 Hz / 45 - 55 Hz 60 Hz / 55 - 65 Hz	
Harmonic (THD)		< 3 % (at rated power)	
Power factor at rated power / Adjustable power factor		> 0.99 / 0.8 leading - 0.8 lagging	
Feed-in phases / Connection phases		1 / 1	
Efficiency			
Max. efficiency / European efficiency	97.8 % / 96.9 %	97.8% / 97.2 %	97.8 % / 97.3 %
Protection			
Grid monitoring		Yes	
DC reverse polarity protection		Yes	
AC short-circuit protection		Yes	
Leakage current protection		Yes	
Surge Protection		DC type II / AC type II	
DC switch		Yes	
PV string current monitoring		Yes	
Arc fault circuit interrupter (AFCI)		Yes	
PID Zero function		Yes	
General Data			
Dimensions (W * H * D)		320 mm * 225 mm * 120 mm	
Weight		6 kg	
Mounting method		Wall-mounting bracket	
Topology		Transformerless	
Degree of protection		IP65	
Operating ambient temperature range		-25 °C to 60 °C	
Allowable relative humidity range (non-condensing)		0 % - 100 %	
Cooling method		Natural cooling	
Max. operating altitude		4000 m	
Display		LED digital display & LED indicator	
Communication		Ethernet / WLAN / RS485 / DI (Ripple control & DRM)	
DC connection type		MC4 (Max. 6 mm ²)	
AC connection type		Plug and play connector (Max. 6 mm ²)	
Grid compliance		IEC / EN62109-1/2, IEC / EN62116, IEC / EN61727, IEC / EN61000-6-2/3, EN50549-1, AS4777.2, UNE 217002:2020, NTS V2 TypeA, CEI 0-21:2020, VDE0126-1-1/ A1 (VFR-2019), UTE C15-712, C10/11, G98/G99	
Grid Support		Active & reactive power control and power ramp rate control	

